

Delta Indirect
Urban decorative lighting





Delta Indirect
Urban decorative lighting







Delta Indirect. Maximum discretion.

Sometimes, the best quality of an exterior luminaire is its ability to put the spotlight on the space it illuminates. That is the case with the Delta Indirect series. An option of prudent and minimalistic design that stands out for its discretion, respect for the environment, and above all, knowing how to always stay tastefully in the background.

Delta Indirect
Urban decorative lighting



F-24815-HS HIT-DE 150W

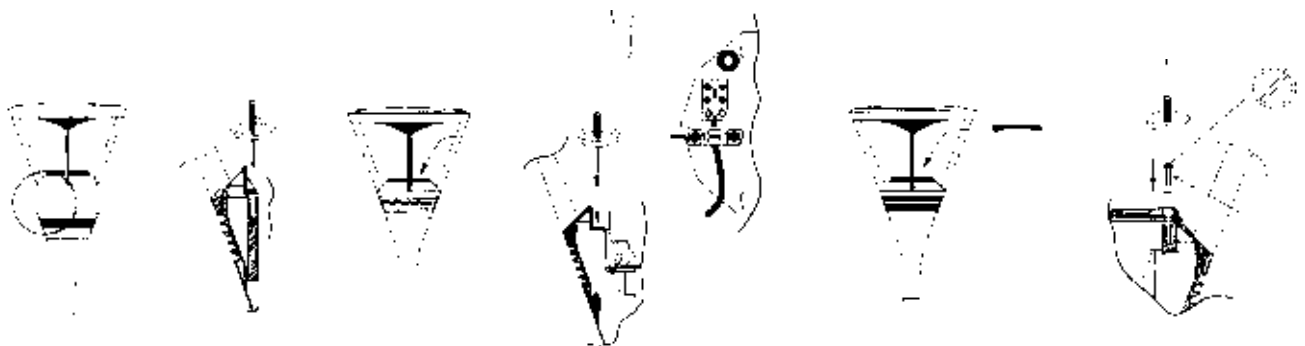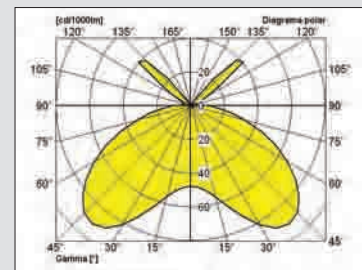






Technical Data


- Protection degree IP 65 IK 10.
 - Isolation degree Class II.
 - Base, intermediate body, closing ring and top part made from aluminium alloy.
 - Upper deflector made from steel sheet white polyester powder finished UV rays stabilised.
 - Hemispherical reflector made from high purity sand blasted aluminium.
 - Control gear plate made from galvanised steel sheet.
- Fixed to the same on its upper part we supply:
- Ceramic lampholder.
- And on its lower part:
- Ballast, ignitor and capacitor, fully wired.
 - Connection terminal to connect to the mains.
 - Fixation clamp for feeding cable.
 - Top cover made from fully protected galvanized steel sheet.
 - Tempered closing glass for the optics.
 - Rx7s ceramic lampholder.
 - Finishing in high corrosion resistant polyester resin.
 - Outside stainless steel screws.
 - Coupling to columns with Ø60x100 length spigot.
- Supplied in three cartons:
- One with the top set.
 - One with the lower set.
 - And the third with the control gear.
 - White RAL 9003, Black RAL 9011, Green RAL 6012 and Forge-Grey.

Suggestions of use

Outdoor decorative lighting, streets, parks and squares.
Available colours

	Lámp	W	Lampholder	Equipment	 Delta Indirect	Weight (Kg)
	M.H./H.P.S.	70	Rx7s	YES	F-24870-HS	16,75
	M.H./H.P.S.	150	Rx7s	YES	F-24815-HS	17,55

Please specify desired colour when ordering, adding after the code number: (-B) White, (-N) Black, (-V) Green and (-GF) Forge-Grey.

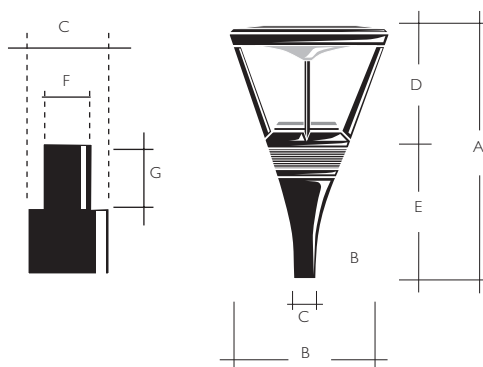

	A	B	C	D	E	F	G
Delta Indirect	912	Ø589	Ø78	495	477	Ø60	100