

**FR 2 luminaire**  
Urban decorative lighting








Class I  IP 43


**Technical Data**

- Protection degree IP 43.
- Isolation degree Class I.
- Vandal-proof luminaire with built-in control gear.
- Enamelled injected aluminium base, Green RAL 6005 colour.
- High impact resistant opal polycarbonate diffuser.
- Enamelled aluminium top cover, white colour inside, green colour outside.
- Ceramic lampholder, earthing and watertightness gasket.
- Corrosion resistant.
- Fixation to Ø 60 x 55 mm. spigot.




| Lamp   | W         | Lampholder | Equipment | Code      | Weight (Kg) |
|--|-----------|------------|-----------|-----------|-------------|
|  M.V.C.C./HPS | 80-125/70 | E-27       | Empty     | F-22027   | 2,00        |
|  M.V.C.C.     | 80        | E-27       | YES       | F-22080-M | 3,60        |
|  M.V.C.C.     | 125       | E-27       | YES       | F-22125-M | 3,70        |
|  M.V.C.C.    | 250       | E-40       | Empty(*)  | F-22040   | 2,10        |
|  HPS        | 70        | E-27       | YES       | F-22070-S | 3,70        |

\* Without ignitor

Lamp with built-in ignitor 

\* The control gear for model F-22040 must be installed separately as there is no room enough inside the fitting to house it.

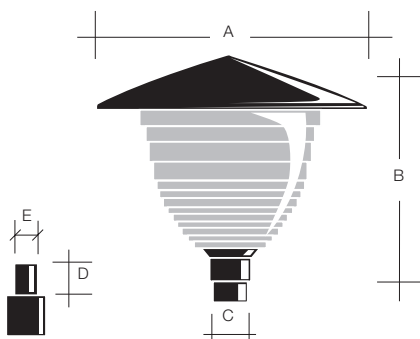

|     | A    | B   | C   | D  | E   |
|-----|------|-----|-----|----|-----|
| FR2 | Ø550 | 335 | Ø78 | 55 | Ø60 |