


**FR 2 luminaire**  
Urban decorative lighting








Class I  IP 43


**Technical Data**

- Protection degree IP 43.
- Isolation degree Class I.
- Vandal-proof luminaire with built-in control gear.
- Enamelled injected aluminium base, Green RAL 6005 colour.
- High impact resistant opal polycarbonate diffuser.
- Enamelled aluminium top cover, white colour inside, green colour outside.
- Ceramic lampholder, earthing and watertightness gasket.
- Corrosion resistant.
- Fixation to Ø 60 x 55 mm. spigot.




Lamp	W	Lampholder	Equipment	Code	Weight (Kg)
 M.V.C.C./HPS	80-125/70	E-27	Empty	F-22027	2,00
 M.V.C.C.	80	E-27	YES	F-22080-M	3,60
 M.V.C.C.	125	E-27	YES	F-22125-M	3,70
 M.V.C.C.	250	E-40	Empty(*)	F-22040	2,10
 HPS	70	E-27	YES	F-22070-S	3,70

\* Without ignitor

Lamp with built-in ignitor 

\* The control gear for model F-22040 must be installed separately as there is no room enough inside the fitting to house it.

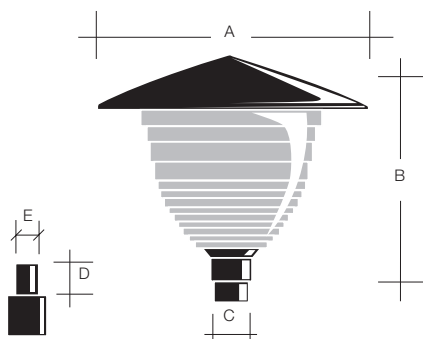

	A	B	C	D	E
FR2	Ø550	335	Ø78	55	Ø60