

**Bjc ML- 250**  
Street Lighting
















**Class I** ♦ **IP 66 IK 10**

**Technical data**

- Protection degree IP 66 IK10.
- Isolation degree Class I.
- Street lighting luminaire with frame and cover made from die cast aluminium.
- Luminaire closure made from stainless steel and situated at the front of the unit.
- Reflector, stamped in a piece, made from, made of polished anodized aluminium.
- Diffuser: Lenticular tempered glass.
- Equipment plate with plug-in connectors for quick and easy installation and maintenance.
- 2 M20 glands: One for the power cable and another, with a filter.
- Integrated installation system: vertical for columns, and lateral, for brackets.


Coupling diameters 48+60 mm.

- Orientation when installed on a column: 0°+30°.
- Orientation when installed on a bracket: 5°+25°.
- Finish: Polyester powder in GF colour.

Lamp	(W)	Lampholder	Equipment		(Kg)
 M.V.	80	E-27	YES	<b>F-46080-M</b>	7,90
 M.V.	125	E-27	YES	<b>F-46125-M</b>	8,00
 M.V.	125	E-27	Double level*	<b>F-46125-2M</b>	8,20
 M.V.	250	E-40	YES	<b>F-46250-M</b>	9,30
 M.V.	250	E-40	Double level*	<b>F-46250-2M</b>	9,50
 H.P.S.	70	E-27	YES	<b>F-46070-S</b>	7,90
 H.P.S./M.H.	100	E-40	YES	<b>F-46100-S</b>	8,60
 H.P.S.	100	E-40	Double level*	<b>F-46100-2S</b>	8,80
 H.P.S./M.H.	150	E-40	YES	<b>F-46150-S</b>	9,40
 H.P.S.	150	E-40	Double level*	<b>F-46150-2S</b>	9,60
 H.P.S./M.H.	250	E-40	YES	<b>F-46250-S</b>	9,90
 H.P.S.	250	E-40	Double level*	<b>F-46250-2S</b>	10,10
M.V./H.P.S./M.H.	Máx. 150	E-27	Without	<b>F-46027</b>	6,00
M.V./H.P.S./M.H.	Máx. 250	E-40	Without	<b>F-46040</b>	6,10
M.V./H.P.S./M.H.	Máx. 150	E-27	Gear Tray Only	<b>F-46127</b>	6,10
M.V./H.P.S./M.H.	Máx. 250	E-40	Gear Tray Only	<b>F-46140</b>	6,20

△ Control gear without ignitor, for lamps with internal ignitor

\* Double power level: The maximum power is reached with the control line connected to the mains.

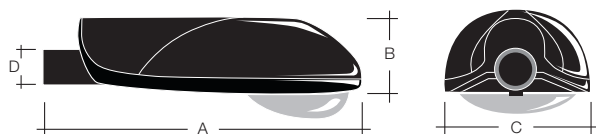

	A	B	C	D
<b>Bjc ML-250</b>	750	200	350	Ø48+60

F-46250-S

H.P.S. 250W

