

Bjc ML- 250
Street Lighting















Class I ♦ **IP 66 IK 10**

Technical data

- Protection degree IP 66 IK10.
- Isolation degree Class I.
- Street lighting luminaire with frame and cover made from die cast aluminium.
- Luminaire closure made from stainless steel and situated at the front of the unit.
- Reflector, stamped in a piece, made from, made of polished anodized aluminium.
- Diffuser: Lenticular tempered glass.
- Equipment plate with plug-in connectors for quick and easy installation and maintenance.
- 2 M20 glands: One for the power cable and another, with a filter.
- Integrated installation system: vertical for columns, and lateral, for brackets.


Coupling diameters 48+60 mm.

- Orientation when installed on a column: 0°+30°.
- Orientation when installed on a bracket: 5°+25°.
- Finish: Polyester powder in GF colour.

| Lamp | (W) | Lampholder | Equipment |  | (Kg) |
|---|----------|------------|----------------|---|-------|
|  M.V. | 80 | E-27 | YES | F-46080-M | 7,90 |
|  M.V. | 125 | E-27 | YES | F-46125-M | 8,00 |
|  M.V. | 125 | E-27 | Double level* | F-46125-2M | 8,20 |
|  M.V. | 250 | E-40 | YES | F-46250-M | 9,30 |
|  M.V. | 250 | E-40 | Double level* | F-46250-2M | 9,50 |
|  H.P.S. | 70 | E-27 | YES | F-46070-S | 7,90 |
|  H.P.S./M.H. | 100 | E-40 | YES | F-46100-S | 8,60 |
|  H.P.S. | 100 | E-40 | Double level* | F-46100-2S | 8,80 |
|  H.P.S./M.H. | 150 | E-40 | YES | F-46150-S | 9,40 |
|  H.P.S. | 150 | E-40 | Double level* | F-46150-2S | 9,60 |
|  H.P.S./M.H. | 250 | E-40 | YES | F-46250-S | 9,90 |
|  H.P.S. | 250 | E-40 | Double level* | F-46250-2S | 10,10 |
| M.V./H.P.S./M.H. | Máx. 150 | E-27 | Without | F-46027 | 6,00 |
| M.V./H.P.S./M.H. | Máx. 250 | E-40 | Without | F-46040 | 6,10 |
| M.V./H.P.S./M.H. | Máx. 150 | E-27 | Gear Tray Only | F-46127 | 6,10 |
| M.V./H.P.S./M.H. | Máx. 250 | E-40 | Gear Tray Only | F-46140 | 6,20 |

△ Control gear without ignitor, for lamps with internal ignitor

* Double power level: The maximum power is reached with the control line connected to the mains.

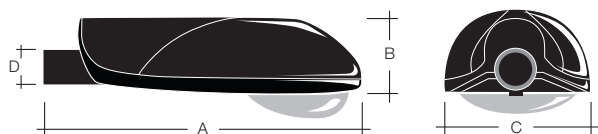

| | A | B | C | D |
|-------------------|-----|-----|-----|--------|
| Bjc ML-250 | 750 | 200 | 350 | Ø48+60 |

F-46250-S

H.P.S. 250W

